

PARTS LIST FOR SANSUI SPEAKER SYSTEM

PM-C100


Ref No. USP-42

PM-C100

SANSUI ELECTRIC CO., LTD.

Sansui


1. FRONT VIEW

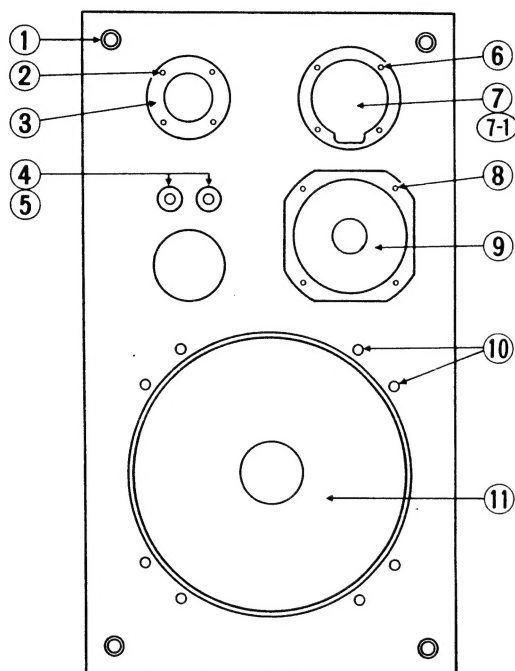

Parts List

Parts No.	Stock No.	Description
1	52944900	Ratch
2	14234000	Binding Head Screw, 4 x 25
3	14230000	Supper Tweeter, T-193
4	14228600	Knob, rotary switch
5	11015300	Rotary Switch
6	14234000	Binding Head Screw, 4 x 25
7	14229900	Tweeter, T-192
7-1	14248300	Tweeter, Cover Ass'y
8	14234000	Binding Head Screw, 4 x 25
9	14229800	Midrange, S-163
10	14230700	Binding Head Screw, 8 x 30
11	14229700	Woofer, W-230
	14224100	Front Grille Ass'y
	52942200	Strike


2. PACKING PARTS LIST

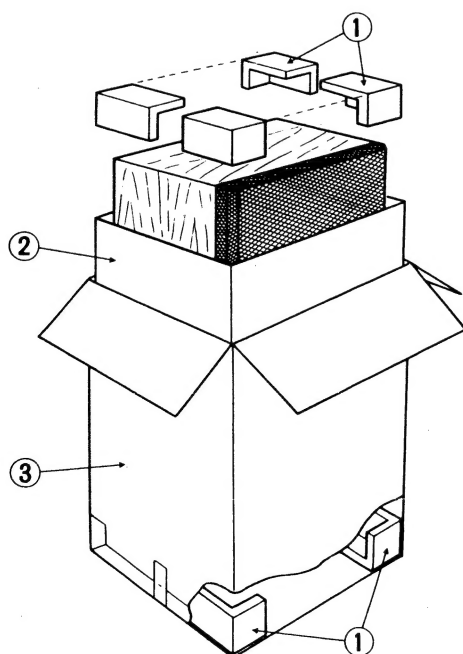



Parts List

Parts No.	Stock No.	Description
1	90243300	Styrofoam Packing
2	14038600	Inner Bag
3	14247300	Carton Case
<Accessory Parts>		
	38341400	Speaker Cord
	46399700	Operating Instruction

3. Crossover Network

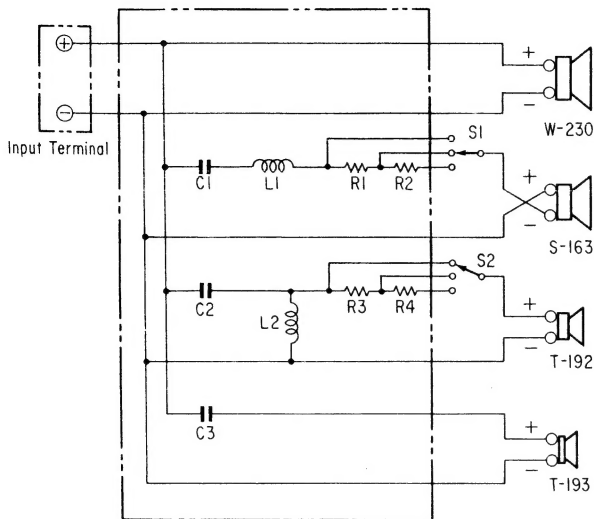

Parts List		
Parts No.	Stock No.	Description
R1	07190500	2.2Ω 10W N.I.R.
R2	07190700	4.7Ω 10W N.I.R.
R3	07190600	3.3Ω 10W N.I.R.
R4	07190700	4.7Ω 10W N.I.R.
C1	00310000	8.2μF 50V E.B.
C2	00309000	3.3μF 50V E.B.
C3	46423700	0.27μF 50V E.B.
S1, 2	11015300	Rotary Switch
	14247400	2P Push Terminal

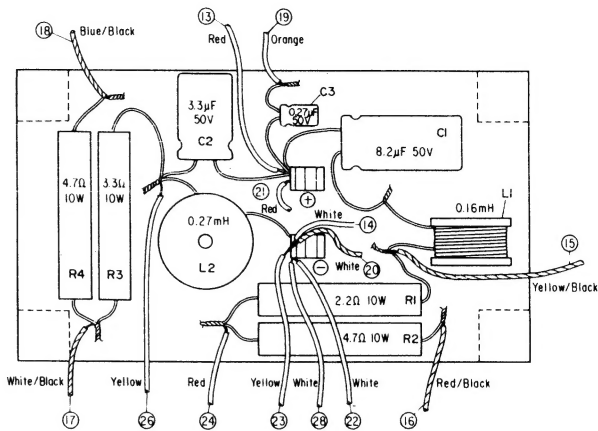

- Abbreviations
- N.I.R.: Non-Inflammable Resistor
E.B.: Bi-Polar Electrolytic Capacitor

4. SPECIFICATIONS

Speakers used	4-way 4-speaker-type	Crossover frequencies	2,000 Hz, 8,000 Hz, 16,000 Hz
Woofer	344 mm (13-17/32") Cone-type	Enclosure	Walnut grain vinyl
Midrange	150 mm (5-29/32") Cone-type	Dimensions	380 mm (14-31/32") W
Tweeter	30 mm (1-3/16")		670 mm (26-3/8") H
	Plane diaphragm type		326 mm (12-27/32") D
Super tweeter	25 mm (1")	Weight	18.2 kg (40.1 lbs) net
	Plane ribbon direct radiator type		20.5 kg (45.2 lbs) packed
Maximum input power	260 watts	* Design and specifications subject to change without notice for improvements.	
Impedance	8 ohms		
Sensitivity	92 dB/W (at 1m)		
Frequency range	30 to 40,000 Hz (in normal listening room)		